

PROFILE F

PROFILE A

PROFILE AS

PROFILE



2014 Professional



CONTENTS

PROFILE F 02

PROFILE A 06

PROFILE AS 10

SPECS 14

FEATURES 15



COLOMBIA - HEADQUARTERS MAILING ADDRESS

AB MARINE GROUP
CALLE 1E No. 2-15, BODEGA No. 9
ZONA FRANCA DE BARRANQUILLA
BARRANQUILLA, ATLANTICO
PHONE: +57 (5) 379.5132
FAX: +57 (5) 379.5667
INFO@ABINFLATABLES.COM

AB Inflatables, a division of AB Marine Group, is world renowned as the premier designer and manufacturer of inflatable boats for both the leisure and professional markets. AB Inflatables has a long established reputation for innovative design, superior construction, and outstanding customer satisfaction.

Our boats have earned their status as the world's finest inflatables. AB is one of only a few RIB manufacturers to have CE, NMMA as well as ISO 9001 certification. At AB, we insist on an unwavering attention to detail. We travel the world to procure the finest materials available. We painstakingly hand-craft each boat, to ensure that even the smallest details are considered. The result is a full line of inflatable boats, designed and built to provide our customers with the exceptional quality they deserve, and have come to expect from AB.

We are committed to meeting the ever changing needs of our customers. It is this commitment that drives our desire for constant innovation. AB Inflatables has never shied away from the hard work of refining our existing models, designing new inflatables, or retooling our workshop to ensure that AB boats are truly the most celebrated watercraft on the market. This un-equalled pursuit of perfection has long distinguished AB from the competition.

With four decades of proven expertise, AB Inflatables has earned its reputation for excellence. Our unparalleled craftsmanship, relentless innovation, and commitment to customer service have made the entire AB line the most prestigious and sought after inflatables on the market. Contact one of our dealers today to discover for yourself why AB Inflatables are the choice of discriminating boaters worldwide.

44



YEARS OF INNOVATION AND CRAFTSMANSHIP



PROFILE

F

The heavy duty "F-Series" professional fiberglass RIBs have an open design that allows for easy customization. Our wide variety of seats and consoles allow the professional to design the boat to fit their needs instead of having to compromise on a set design. Our deep V forward hull design provides for superior stability and a drier ride. The reinforced commercial grade fiberglass hulls with the 1670 D-tex CSM Fabric make them an excellent choice for the discerning professional.

WHEN PERFORMANCE COUNTS



F 19




F 24

- Military grade Orca (CSM) fabric**
- Fiberglass reinforced professional grade hull**
- Unsurpassed performance**
- Open and spacious design**
- Deep V Hull**
- Custom accessories upon request**
- Double solid Rub Rail**



Professional Fiberglass Boats

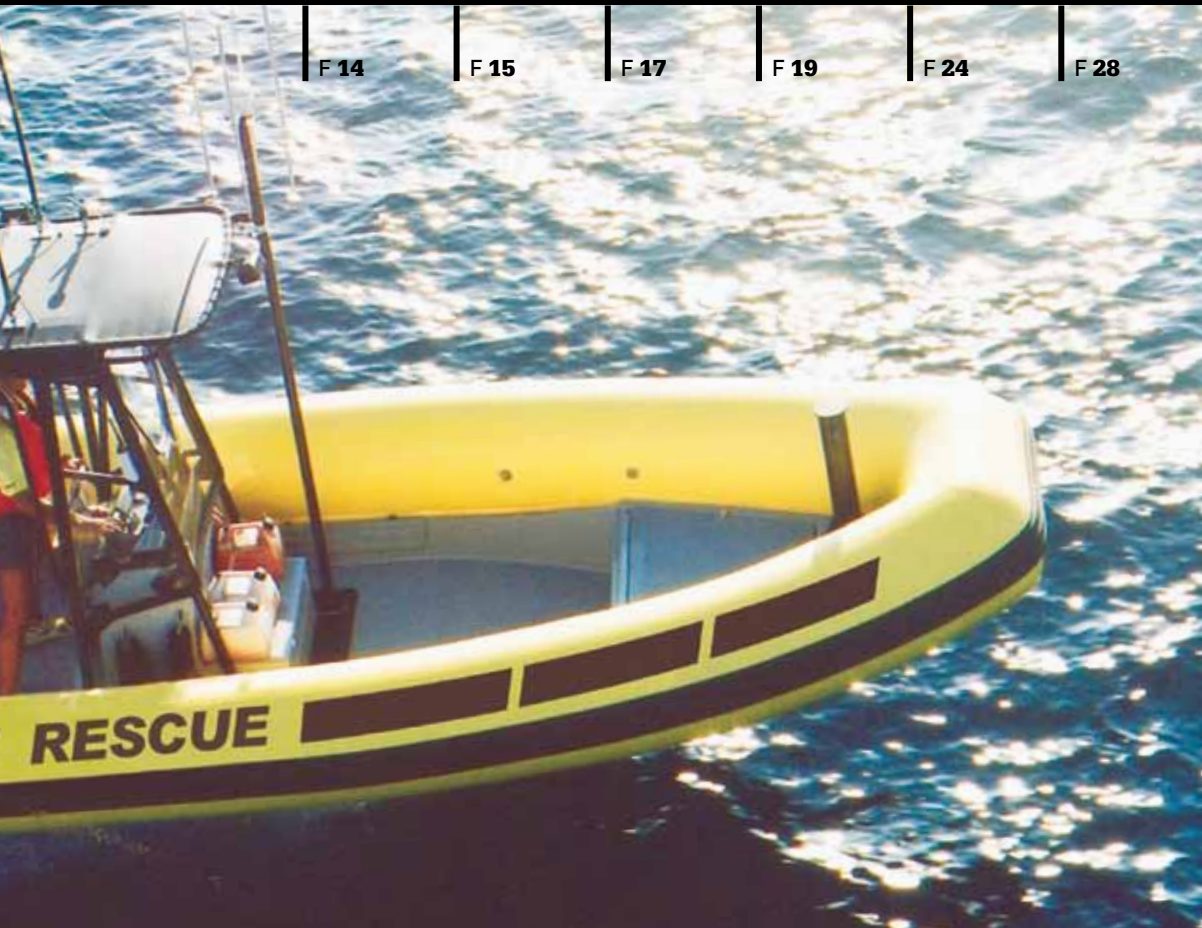







STANDARD FEATURES

- BOW EYE
- MAINTENANCE KIT
- DOUBLE SOLID RUB RAIL
- TOWING RINGS
- 3-4 STAINLESS STEEL LIFTING RINGS
- NON-SKID ORCA (CSM) FABRIC ON TOP OF TUBE
- NON-SKID FLOOR
- 4 LAYER REINFORCED SEAMS
- HEAVY DUTY 1670 DECITEX ORCA (CSM) FABRIC
- LIFE LINE AROUND TUBE
- HAND PUMP
- OWNER'S MANUAL
- BOW LOCKER
- PRESSURE RELIEVE VALVES

OPTIONAL FEATURES

- FIBERGLASS OR ALUMINUM JOCKEY CONSOLES
- FIBERGLASS CONSOLES
- ALUMINUM LEANING BOLSTERS
- CUSTOMIZED ALUMINUM CONSOLES AND SEATS
- TUBE CHAPS
- COVER
- CHOCK SET
- LIFTING HARNES
- ELECTRONICS UPON REQUEST
- T-TOP
- LIGHT ARCH
- ENGINE GUARD
- STERN/BOW TOWING POST

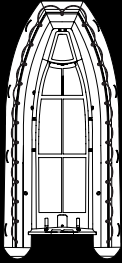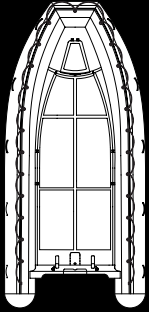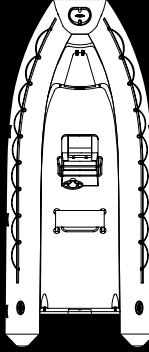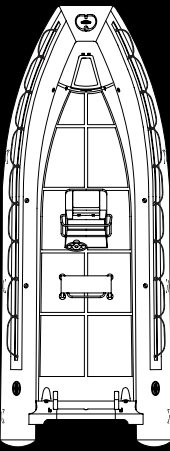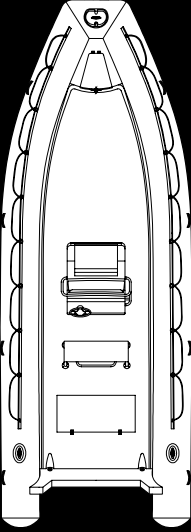

PROFILE	F 14*	F 15*	F 17*	F 19	F 24	F 28
						
Overall Length	14' / 4,27m	Overall Length 15' / 4,57m	Overall Length 17' / 5,18m	Overall Length 19' / 5,79m	Overall Length 24' / 7,31m	Overall Length 27'4" / 8,33m
Overall Beam	6'4" / 1,94m	Overall Beam 6'6" / 1,99m	Overall Beam 8'1" / 2,05m	Overall Beam 8'4" / 2,53m	Overall Beam 9'3" / 2,82m	Overall Beam 10'1" / 3,07m
Inside Length	10'10" / 3,3m	Inside Length 11'6" / 3,5m	Inside Length 13'1" / 4m	Inside Length 15'2" / 4,62m	Inside Length 19'3" / 5,87m	Inside Length 22' 11" / 6,99m
Inside Beam	3'1" / 0,94m	Inside Beam 3'2" / 0,97m	Inside Beam 4'4" / 1,33m	Inside Beam 4'1" / 1,25m	Inside Beam 5'4" / 1,64m	Inside Beam 6' 4" / 1,93m
Tube Diameter	19" / 0,48m	Tube Diameter 19" / 0,48m	Tube Diameter 20" / 0,50m	Tube Diameter 22" / 0,58m	Tube Diameter 24" / 0,61m	Tube Diameter 24" / 0,61m
Person Capacity	8	Person Capacity 9	Person Capacity 10	Person Capacity 15	Person Capacity 20	Person Capacity 25
Weight	347,6lbs / 158kg	Weight 484lbs / 220kg	Weight 772lbs / 350kg	Weight 1157,2lbs/526kg	Weight 1980lbs / 900kg	Weight 2853,4lbs/1297kg
Recommended HP	40	Recommended HP 60	Recommended HP 75	Recommended HP 115	Recommended HP 150	Recommended HP 250
Maximum HP	50	Maximum HP 75	Maximum HP 90	Maximum HP 150	Maximum HP 250	Maximum HP 450
Shaft Length	20" / 50,8cm	Shaft Length 20" / 50,8cm	Shaft Length 20" / 50,8cm	Shaft Length 25" / 63,5cm	Shaft Length 25" / 63,5cm	Shaft Length 30" / 76,2cm

(*) WEIGHTSPEC APPLIES FOR THE OPEN VERSION

PICTURE A
TOWING POST

PICTURE B
LIGHT ARCH WITH ENGINE GUARD

PICTURE C
T-TOP



F 19



F 19



F 14

STAINLESS STEEL BOW EYE

BOW LOCKER HATCH / SEAT

STAINLESS STEEL LIFTING POINTS

1670 DECITEX ORCA (CSM) FABRIC

NON SKID FABRIC ON TUBE


OPEN STYLE DECK

FIBERGLASS REINFORCED PROFESSIONAL GRADE HULL

LIFELINE AROUND TUBE

STAINLESS STEEL LIFTING POINTS

STAINLESS STEEL TOWING RINGS

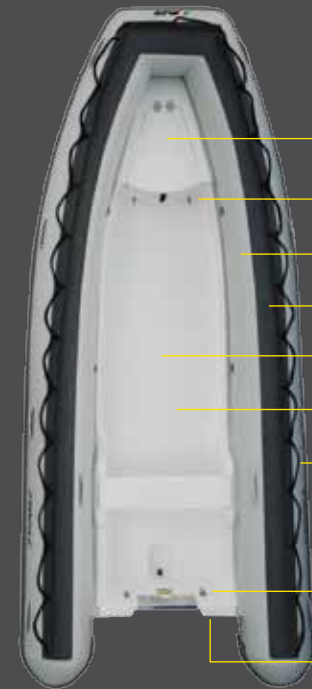

profile F 14
MAIN FEATURES



ISO 9001

BUREAU VERITAS
Certification



ISO 9001
CERTIFIED



PROFILE

A

Professional

Our "A- Series" Deep V models are designed to handle all weather conditions the elements can dish up. Their rugged yet lightweight aluminum hulls along with the tough 1670 D-tex CSM fabric make them the ideal boat for any rescue or commercial operation. These boats can be customized for any use with a variety of seats and consoles to suit any need. They are the most versatile professional RIBs on the market today.



A 11

A 12

LIGHT IN WEIGHT, HEAVY IN STRENGTH



A 12



A 16

- Military Grade Orca (CSM) Fabric**
- Aluminum Reinforced Professional Grade Hull**
- Durable enough for rocky shores & coral reefs**
- Deep V Hull**
- Custom accesories upon request**
- Double solid Rub Rail**



Aluminum Boats



A 13

A 14

A 15

A 16

STANDARD FEATURES

- BOW EYE
- DRAIN SCUPPERS
- MAINTENANCE KIT
- DOUBLE SOLID RUB RAIL
- TOWING RINGS
- 3-4 ALUMINUM LIFTING RINGS
- NON-SKID ORCA (OSMI) FABRIC ON TOP OF TUBE
- NON-SKID RUBBER FLOOR PANELS
- 4 LAYER REINFORCED SEAMS
- HEAVY DUTY 1670 DECITEX ORCA (OSMI) FABRIC
- LIFE LINE AROUND TUBE
- HAND PUMP
- OWNER'S MANUAL
- PRESSURE RELIEF VALVES




A 16

OPTIONAL FEATURES

- BOW LOCKER
- ALUMINUM CONSOLE
- FIBERGLASS JOCKEY CONSOLES
- CUSTOMIZED ALUMINUM CONSOLES AND SEATS
- ALUMINUM JOCKEY CONSOLE
- ALUMINUM JOCKEY SEAT
- ALUMINUM LEANING BOLSTER
- TUBE CHAPS
- COVER
- CHOCK SET
- LIFTING HARNESS
- ELECTRONICS UPON REQUEST




PROFILE A 11

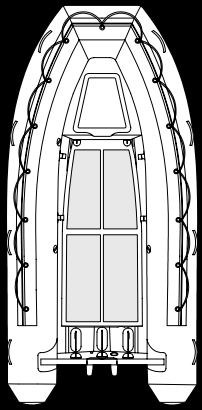


Overall Length	11'6" / 3,5m
Overall Beam	5'7" / 1,7m
Inside Length	8'6" / 2,6m
Inside Beam	2'8" / 0,81m
Tube Diameter	17" / 0,43m
Person Capacity	6
Weight	214lbs / 97kg*
Recommended HP	15
Maximum HP	20
Shaft Length	20" / 50,8cm

A 12

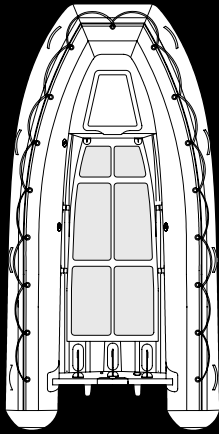


Overall Length	12' / 3,66m
Overall Beam	6'1" / 1,85m
Inside Length	8'10" / 2,7m
Inside Beam	2'11" / 0,89m
Tube Diameter	18" / 0,46m
Person Capacity	6
Weight	231lbs / 105kg*
Recommended HP	25
Maximum HP	30
Shaft Length	20" / 50,8cm

A 13

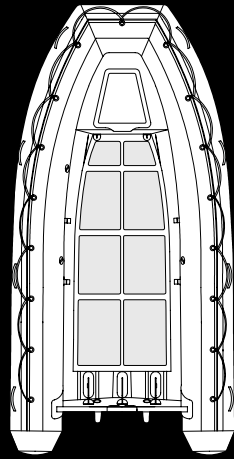


Overall Length	13' / 3,96m
Overall Beam	6'7" / 2m
Inside Length	9'10" / 3m
Inside Beam	3'3" / 0,99m
Tube Diameter	18" / 0,46m
Person Capacity	7
Weight	256lbs / 116kg*
Recommended HP	25
Maximum HP	30
Shaft Length	20" / 50,8cm

A 14

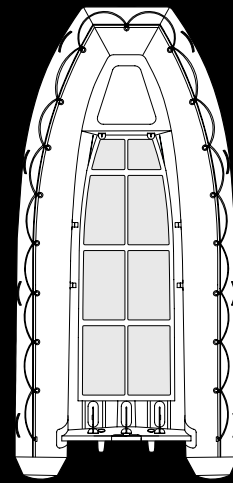


Overall Length	14' / 4,27m
Overall Beam	6'7" / 2m
Inside Length	10'10" / 3,3m
Inside Beam	3'3" / 0,99
Tube Diameter	19" / 0,48m
Person Capacity	8
Weight	287lbs / 130kg*
Recommended HP	30
Maximum HP	40
Shaft Length	20" / 50,8cm

A 15

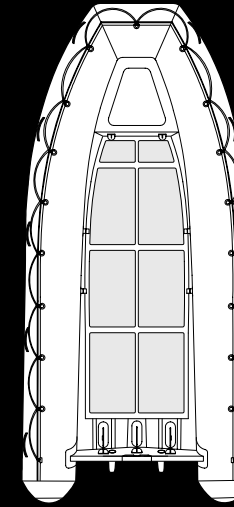

Overall Length	15' / 4,57m
Overall Beam	6'9" / 2,06m
Inside Length	11'8" / 3,55m
Inside Beam	3'4" / 1,03m
Tube Diameter	19" / 0,48m
Person Capacity	9
Weight	328lbs / 149kg*
Recommended HP	30
Maximum HP	40
Shaft Length	20" / 50,8cm

A 16

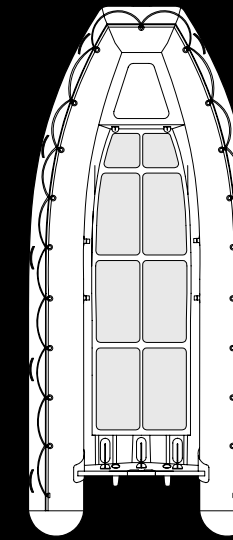

Overall Length	16' / 4,88m
Overall Beam	7' / 2,14m
Inside Length	12'8" / 3,85m
Inside Beam	3'6" / 1,08m
Tube Diameter	21" / 0,53m
Person Capacity	10
Weight	377lbs / 171kg*
Recommended HP	30
Maximum HP	50
Shaft Length	20" / 50,8cm

[*] WEIGHT WITHOUT BOW LOCKER
 ADD 5KG / 11 LBS FOR MODEL 11
 ADD 7KG / 15 LBS FOR MODELS 12-16

PICTURE A
 OPTIONAL ALUMINUM JOCKEY SEAT
 WITH COMPARTMENT FOR FUEL
 TANK

PICTURE B
 BOW LOCKER PROVIDES SEATING
 AND AMPLE STORAGE






A 15



A 15

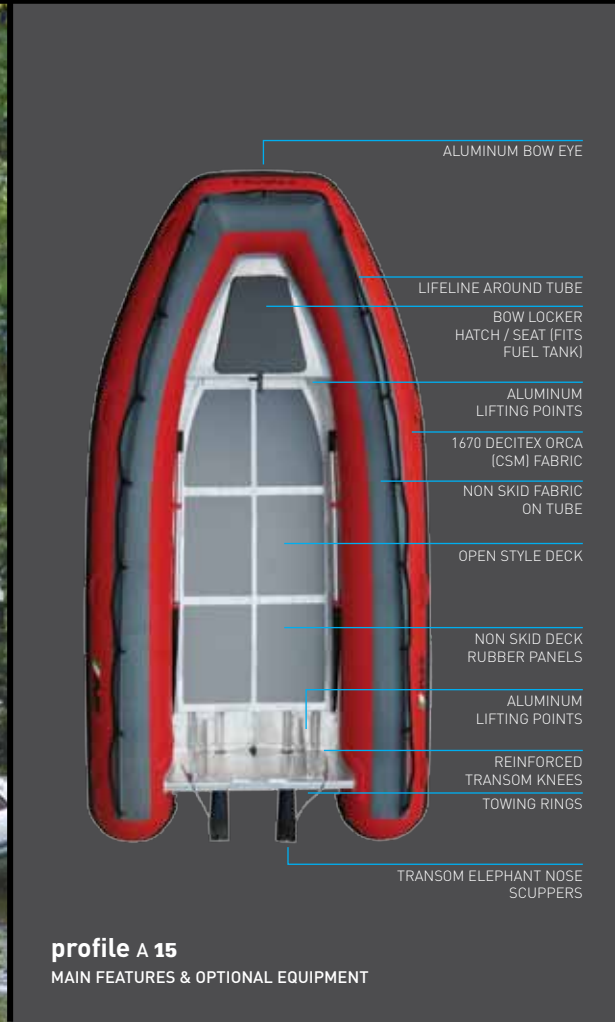

profile A 15
MAIN FEATURES & OPTIONAL EQUIPMENT

A 15



PROFILE

AS

AB Inflatables introduces the all new swift water shallow V "AS-Series". AB is constantly looking at the needs in the Rescue and Commercial industries. This new versatile use series will get into shallow flood waters without fear of what is below as well as handling the swift waters of rivers or flooded streams. Combining the best of all worlds with marine grade aluminum and 1670 D-tex CSM fabric making them the most durable boat on the market. With their open design and a variety of seats and consoles they can be customized for any use.

WHEN GETTING CLOSE COUNTS



A 16-S




A 16-S

Military Grade Orca (CSM) Fabric
Aluminum Reinforced Professional Grade Hull
Durable enough for rocky shores
Shallow Water Version Hull
Custom accesories upon request
Double solid Rub Rail



Professional Shallow Water Aluminum Boats

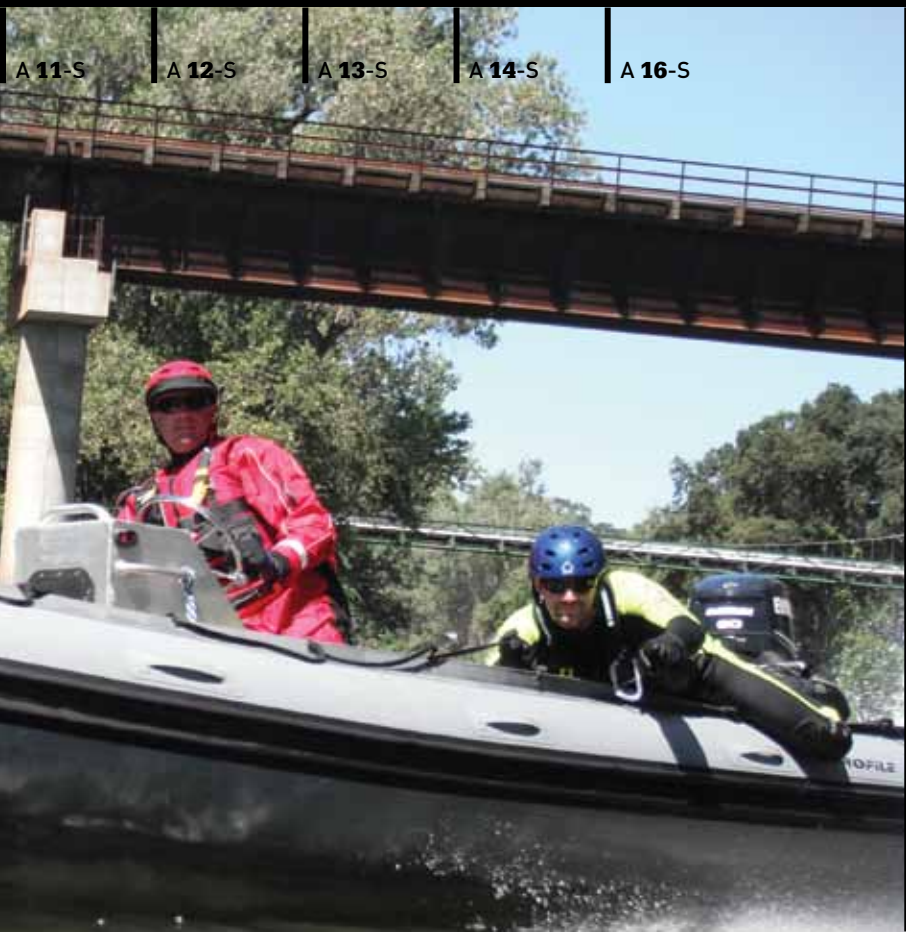

A 16-S






STANDARD FEATURES

- BOW EYE
- DRAIN SCUPPERS
- MAINTENANCE KIT
- DOUBLE SOLID RUB RAIL
- TOWING RINGS
- 3-4 ALUMINUM LIFTING RINGS
- NON-SKID ORCA (CSM) FABRIC ON TOP OF TUBE
- NON-SKID RUBBER FLOOR PANELS
- 4 LAYER REINFORCED SEAMS
- HEAVY DUTY 1670 DECITEX ORCA (CSM) FABRIC
- LIFE LINE AROUND TUBE
- HAND PUMP
- OWNER'S MANUAL
- PRESSURE RELIEF VALVES

OPTIONAL FEATURES

- BOW LOCKER
- ALUMINUM CONSOLE
- CUSTOMIZED ALUMINUM CONSOLES AND SEATS
- FIBERGLASS JOCKEY CONSOLES
- ALUMINUM JOCKEY CONSOLE
- ALUMINUM JOCKEY SEAT
- ALUMINUM LEANING BOLSTER
- TUBE CHAPS
- COVER
- CHOCK SET
- LIFTING HARNESS
- ELECTRONICS UPON REQUEST


FOR FULL FEATURE LIST
VISIT OUR WEBSITE
WWW.ABINFLATABLES.COM

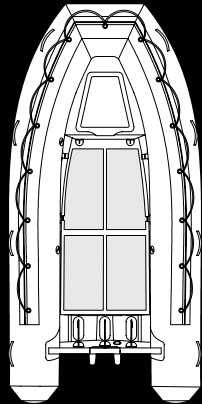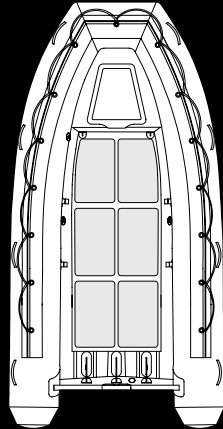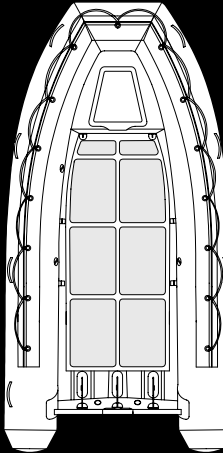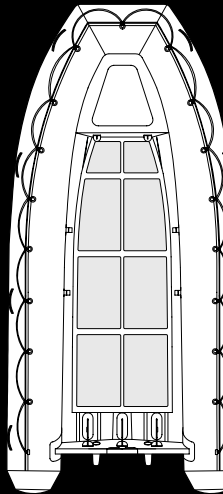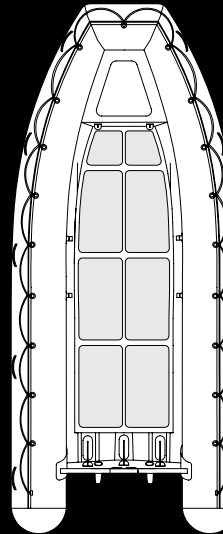PROFILE	A 11-S	A 12-S	A 13-S	A 14-S	A 16-S
					
Overall Length	11' / 3,5m	Overall Length 12' / 3,66m	Overall Length 13' / 3,96m	Overall Length 14' / 4,27m	Overall Length 16' / 4,88m
Overall Beam	57" / 1,7m	Overall Beam 61" / 1,85m	Overall Beam 67" / 2m	Overall Beam 67" / 2m	Overall Beam 7' / 2,14m
Inside Length	86" / 2,6m	Inside Length 8'10" / 2,7m	Inside Length 9'10" / 3m	Inside Length 10'10" / 3,3m	Inside Length 12'8" / 3,85m
Inside Beam	2'8" / 0,81m	Inside Beam 2'11" / 0,89m	Inside Beam 3'3" / 0,99m	Inside Beam 3'3" / 0,99m	Inside Beam 3'6" / 1,08m
Tube Diameter	17" / 0,43m	Tube Diameter 18" / 0,46m	Tube Diameter 18" / 0,46m	Tube Diameter 19" / 0,48m	Tube Diameter 21" / 0,53m
Person Capacity	6	Person Capacity 6	Person Capacity 7	Person Capacity 8	Person Capacity 10
Weight	227lbs / 103kg*	Weight 242lbs / 110kg*	Weight 282lbs / 128kg*	Weight 317lbs / 144kg*	Weight 419lbs / 190kg*
Recommended HP	15	Recommended HP 25	Recommended HP 25	Recommended HP 30	Recommended HP 30
Maximum HP	20	Maximum HP 30	Maximum HP 30	Maximum HP 40	Maximum HP 50
Shaft Length	15" / 38,1cm	Shaft Length 15" / 38,1cm	Shaft Length 20" / 50,8cm	Shaft Length 20" / 50,8cm	Shaft Length 20" / 50,8cm

(*) WEIGHT WITHOUT BOW LOCKER
 ADD 5KG / 11 LBS FOR MODELS 8-11
 ADD 7KG / 15 LBS FOR MODELS 12-16

PICTURE A
 OPTIONAL ALUMINUM JOCKEY SEAT WITH COMPARTMENT FOR FUEL TANK


PICTURE B
 BOW LOCKER PROVIDES SEATING AND AMPLE STORAGE





A 16-S

A 16-S

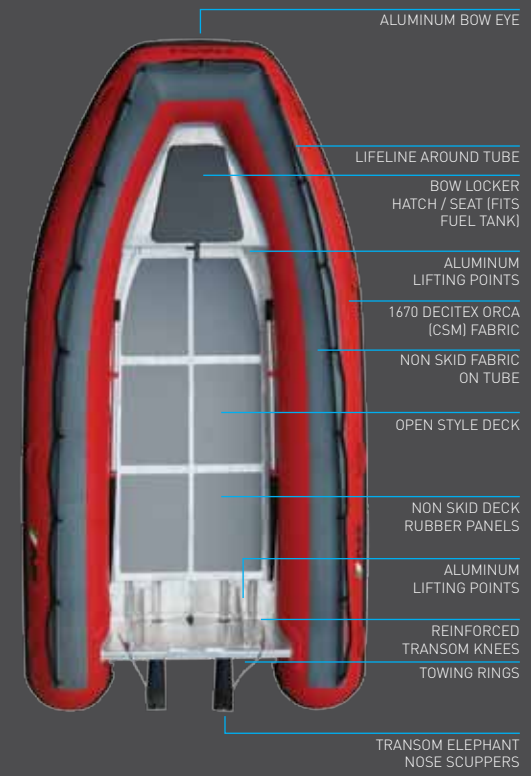

profile A 14-S
MAIN FEATURES



specifications



profile F

profile A

profile AS

F 14 F 15 F 17 F 19 F 24 F 28

A 11 A 12 A 13 A 14 A 15 A 16

A 11-S A 12-S A 13-S A 14-S A 16-S

LENGTH

OVERALL	ft/in	14'	15'	17'	19'	24'	27'4"	11'6"	12'	13'	14'	15'	16'	11'	12'	13'	14'	16'
	m	4.27	4.57	5.18	5.79	7.31	8.33	3.5	3.66	3.96	4.27	4.57	4.88	3.5	3.66	3.96	4.27	4.88
INSIDE	ft/in	10'10"	11'6"	13'1"	15'2"	19'3"	22' 11"	8'6"	8'10"	9'10"	10'10"	11'8"	12'8"	8'6"	8'10"	9'10"	10'10"	12'8"
	m	3.3	3.5	4	4.62	5.87	6.99	2.6	2.7	3	3.3	3.55	3.85	2.6	2.7	3	3.3	3.85

BEAM

OVERALL	ft/in	6'4"	6'6"	8'1"	8'4"	9'3"	10'1"	5'7"	6'1"	6'7"	6'7"	6'9"	7'	5'7"	6'1"	6'7"	6'7"	7'
	m	1.94	1.99	2.05	2.53	2.82	3.07	1.7	1.85	2	2	2.06	2.14	1.7	1.85	2	2	2.14
INSIDE	ft/in	3'1"	3'2"	4'4"	4'1"	5'4"	6' 4"	2'8"	2'11"	3'3"	3'3"	3'4"	3'6"	2'8"	2'11"	3'3"	3'3"	3'6"
	m	0.94	0.97	1.33	1.25	1.64	1.93	0.81	0.89	0.99	0.99	1.03	1.08	0.81	0.89	0.99	0.99	1.08

AREA

INTERNAL AREA	sq.ft.	33.39	36.54	57.26	62.16	103.62	145.21	22.67	25.87	31.97	35.17	39.36	44.76	22.67	25.87	31.97	35.17	44.76
	m2	3.10	3.40	5.32	5.78	9.63	13.49	2.11	2.40	2.97	3.27	3.66	4.16	2.11	2.40	2.97	3.27	4.16

MAX TUBE DIAMETER

	ft/in	19"	19"	20"	22	24"	24"	17"	18"	18"	19"	19"	21"	17"	18"	18"	19"	21"
	m	0.48	0.48	0.50	0.58	0.61	0.61	0.43	0.46	0.46	0.48	0.48	0.53	0.43	0.46	0.46	0.48	0.53

NUMBER OF CHAMBERS

		4+1	5	5	5	6	6	3	3	3	4	5	5	3	3	3	4	5
--	--	-----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

CAPACITY

PERSONS		8	9	10	15	20	25	6	6	7	8	9	10	6	6	7	8	10
PAYLOAD	lbs	2,347	2,277	2,964	3,998	4,525	5,034	1,644	2,032	2,092	2,391	2,607	2,709	1,644	2,032	2,092	2,391	2,709
	kg	1,065	1,033	1345	1,814	2,053	2284	746	922	949	1,085	1,183	1,229	746	922	949	1,085	1,229

WEIGHT

	lbs	347.6*	484*	772*	1157	1980	2853	214**	231**	256**	287**	328**	377**	227**	242**	282**	317**	419**
	kg	158*	220*	350*	526	900	1297	97**	105**	116**	130**	149**	171**	103**	110**	128**	144**	190**

ENGINE

RECOMMENDED	hp	40	60	75	115	150	250	15	25	25	30	30	30	15	25	25	30	30
	kW	29.8	44.8	67.1	85.8	111.9	186.5	11.2	18.7	18.7	22.4	22.4	22.4	11.2	18.7	18.7	22.4	22.4
MAX	hp	50	75	90	150	250	450	20	30	30	40	40	50	20	30	30	40	50
	kW	37.3	56	67.1	111.9	186.5	335.7	14.9	22.4	22.4	29.8	29.8	37.3	14.9	22.4	22.4	29.8	37.3
SHAFT LENGTH	in	20"	20"	20"	25"	25"	30"	20"	20"	20"	20"	20"	20"	15"	15"	20"	20"	20"
	cm	50.8	50.8	50.8	63.5	63.5	76.2	50.8	50.8	50.8	50.8	50.8	50.8	38.1	38.1	50.8	50.8	50.8
MAX WEIGHT	lbs	253	330	365	515	814	1241	132	183	183	242	242	253	132	183	183	242	253
	kg	115	150	166	234	370	564	60	83	83	110	110	115	60	83	83	110	115

BUILT-IN TANKS

GAS	gal	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	lt	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
WATER	gal	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	lt	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

STOWED DIMENSIONS

(LENGTH x WIDTH x HEIGHT)	inch	156x49x28	169x59x43	192x54x47	213x75x32	276x87x35	323x113x47	132x44x19	138x46x26	144x47x32	159x47x32	167x47x32	182x55x32	132x44x19	138x46x26	144x47x32	159x47x32	182x55x32
	cm	395x125x70	430x150x110	490x137x130	540x190x82	700x220x90	820x288x120	334x113x47	350x116x65	365x120x82	405x120x82	425x120x82	463x140x82	334x113x47	350x116x65	365x120x82	405x120x82	463x140x82

RDC DESIGN CATEGORY

		C	C	C	C	B	B	C	C	C	C	C	C	C	C	C	C	C
--	--	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

(*) WEIGHT SPEC APPLIES FOR THE OPEN VERSION
 (**) WEIGHT SPEC APPLIES FOR MODELS WITHOUT BOW LOCKER
 (***) ADD 5 KG / 11 LBS FOR MODEL 11
 (****) ADD 7 KG / 15 LBS FOR MODELS 12-16



features



- STANDARD FEATURES
- OPTIONAL FEATURES

profile F							profile A						profile AS				
F 14	F 15	F 17	F 19	F 24	F 28		A 11	A 12	A 13	A 14	A 15	A 16	A 11-S	A 12-S	A 13-S	A 14-S	A 16-S

(CSM) COATED FABRIC 1670 D-TEX FABRIC	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
(CSM) COATED FABRIC NON SKID ON TUBES	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
ALL ROUND ANCHOR LIGHT				●	●	●											
BENCH SEAT WITH STORAGE	○	○					○	○	○	○	○	○	○	○	○	○	○
BOW AND LATERAL REINFORCED COATED FABRIC HANDLES	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
BOW EYE - ALUMINUM							●	●	●	●	●	●	●	●	●	●	●
BOW EYE - STAINLESS STEEL	●	●	●	●	●	●											
BOW SEAT WITH STORAGE	●	○	○	●	○	●	○	○	○	○	○	○	○	○	○	○	○
CARBON FIBER LOOK SWITCH AND BRAKER BOARD				●	●	●											
CONSOLE ALUMINUM											○	○					○
CONSOLE W/FORWARD SEAT				●	●	●											
DAVIT LIFTING RINGS - ALUMINUM							●	●	●	●	●	●	●	●	●	●	●
DAVIT LIFTING RINGS - STAINLESS STEEL	●	●	●	●	●	●											
DOUBLE SOLID RUB RAIL	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
ENGINE GUARD				○	○	○											
FIBERGLASS BOW STEP WITH SS RETRACTING CLEAT	○	○	○	●	●	●	○	○	○	○	○	○	○	○	○	○	○
FIBERGLASS CONSOLE WITH WINDSHIELD & RAIL	○	○	○	●	●	●	○	○	○	○	○	○	○	○	○	○	○
FUEL SENDING UNIT				●	●	●											
FUEL TANK (UNDERDECK) - ALUMINUM				●	●	●											
FUEL/WATER SEPARATOR & CANISTER				●	●	●											
HAND PUMP / REPAIR KIT	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
JOCKEY CONSOLE (1 PERSON)	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
JOCKEY CONSOLE (2 PERSON)	○	○	○	○	○	○				○	○	○				○	○
LEANING BOLSTER				●	●	●					○	○					○
LIFELINE AROUND TUBE	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
LIGHT ARCH				○	○	○											
NAVIGATION LIGHTS				●	●	●											
NON SKID DECK - DIAMOND SHAPE	●			●	●	●											
NON SKID DECK - RUBBER PANELS		●	●		●		●	●	●	●	●	●	●	●	●	●	●
PADDLES	●	●	●				●	●	●	●	●	●	●	●	●	●	●
REINFORCED TRANSOM KNEES							●	●	●	●	●	●	●	●	●	●	●
RUBBER KEEL PROTECTOR							●	●	●	●	●	●	●	●	●	●	●
PRESSURE RELIEF VALVES	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
SIDE STEP W/STAINLESS STEEL FOLD DOWN CLEAT	○	○	○	●	●	●	○	○	○	○	○	○	○	○	○	○	○
TOWING POST - BOW				○	○	○											
TOWING POST - STERN				○	○	○											
TOWING EYES - STERN (ALUMINUM)							●	●	●	●	●	●	●	●	●	●	●
TOWING EYES - STERN (STAINLESS STEEL)	●	●	●	●	●	●											
TRANSOM ELEPHANT NOSE SCUPPERS (2 7/8 IN INTERNAL Ø)							●	●	●	●	●	●	●	●	●	●	●
T-TOP				○	○	○											
UPHOLSTERY (CLOSED CELL)				●	●	●	○	○	○	○	○	○	○	○	○	○	○

FEATURES FOR THE F 14, F 15 & F 17 STATED ARE FOR THE OPEN VERSION

BOAT SMART FROM THE START!
 TAKE A BOATING EDUCATION COURSE, AND GET A VESSEL SAFETY CHECK FOR YOUR BOAT. FOR MORE INFORMATION CONTACT:
 U.S. COAST GUARD AUXILIARY: (877) 875 6296, (800) 368 5647 OR WWW.CGAUX.ORG / U.S. POWER SQUADRONS: (888) 367 8777 OR WWW.USPS.ORG
REMEMBER: BE SURE THERE IS A PERSONAL FLOTATION DEVICE (PFD) FOR YOU AND EACH OF YOUR PASSENGERS. WE RECOMMEND THE USE OF PFDs DURING ALL BOAT OPERATIONS. PFDs SHOULD BE WORN BY EVERY ONE ON BOARD AT ALL TIMES.

REMEMBER: ALWAYS ATTACH THE STOP-SWITCH SAFETY LANYARD TO YOUR WRIST BEFORE STARTING THE MOTOR AND DURING BOAT OPERATION. BEFORE SETTING OUT, CHECK THAT THE STOP-SWITCH LANYARD IS WORKING PROPERLY AND SHUTS OFF THE ENGINE WHEN PULLED. FOR ADDITIONAL INFORMATION AND LISTING OF WORLDWIDE DEALERS, PLEASE VISIT OUR WEB SITE.

www.abinflatables.com