



STANDBY GENERATORS

G140 -14 kW

**PROTECT YOUR HOME
WITH QUALITY BACKUP POWER**



- **Fully Automated and Quick Response**
A Briggs and Stratton® standby system starts automatically and powers up your home in seconds after sensing a power outage.
- **Powerful and Reliable Performance**
The professional 993cc Vanguard™ engine provides standby power with durability
- **Durable and and Weather Proof**
Perfect for medium-to-large homes, the G140 provides you with reliable power. The Galvanneal steel enclosure provides a sturdy, full weather protection.
- **Trusted Brand**
Briggs & Stratton has been providing reliable engine power for over 100 years. It's a name that you can trust.
- **Powered by Propane (bottle gas/LPG) or Natural Gas**

POWERED BY
VANGUARD
COMMERCIAL POWER





STANDBY GENERATORS

PERMANENT PROTECTION FROM A GLOBAL BRAND

PERFORMANCE	G140
Rated Power (kW) LPG/NG	14 / 12.6
Rated Current (Amps) LPG/NG	61 / 55.5
Starting Watts LPG/NG*	17,400 / 15,800
Voltage (V) - Frequency (Hz)	230 - 50
Phase	Single
Power Factor	1.0

ENGINE	
Engine Type	Briggs & Stratton Vanguard™ V-Twin OHV
Engine Capacity (cc)	993
Engine Speed (RPM)	3000
Fuel Type	Liquid Propane Gas / Natural Gas
Governor Type	Electronic
Start Type	Automatic
Lubrication System	Full pressure
Oil Capacity (l)	2.3
Low Oil Pressure Sensor	Yes
Cooling System Type	Air-cooled
Fuel Consumption LPG (kg/h) @ 50% - 100% load	3.41 - 5.3
Fuel Consumption NG (m3/h) @ 50% - 100% load	4.16 - 6.6

OTHER FEATURES	
Enclosure Materials	Galvanneal Steel
Overcrank Protection	Yes
Continuous Battery Charging	Yes
Sound level (dB) at 7m (50% Load)	66.7
Alternator	Brushed
Voltage Regulation	Automatic
Warranty	3 yrs / 1000 hrs

Product Weight - 226Kg

Product Dimensions: LxWxH - 124 x 80 x 80 cm

Packaged Dimensions: LxWxH: 137 x 96 x 96 cm

* This generator is certified in accordance with UL (Underwriters Laboratories) 2200 (stationary engine generator assemblies) and CSA (Canadian Standards Association) standard C22.2 No. 100-04 (motors and generators).



The Control Panel features an hour meter, a weekly exerciser and provides remote system alert codes.




POWERED BY VANGUARD™ TWIN CYLINDER, HEAVY DUTY AND PROFESSIONAL ENGINE.



100 Amps Automated Transfer Switch** (230V) - OPTIONAL

Whenever there is a power cut, you do not have to worry. The Briggs & Stratton Transfer Switch automatically transfers power to the generator when the mains power fails, providing the highest protection for continuous power.

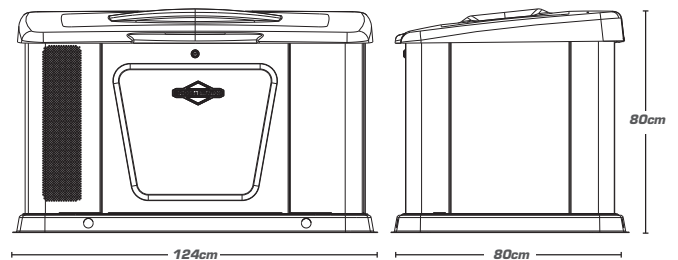

** This transfer switch is certified in accordance with UL (Underwriters Laboratories) 1008 (transfer switch equipment).

The Power Behind The Brands

Barrus is the exclusive distributor for Briggs & Stratton Home Standby Generators. A great British company, Barrus, is proud to have achieved over 100 years in business. Supporting over 60 brands across four diverse market sectors Marine, Garden, Industrial and Vehicle; Barrus is one of the UK's leading importers and distributors of engines, engine powered equipment, garden machinery, tools and accessories.



The Power Behind The Brands

Specifications and/or prices are subject to change without notice. Every effort is made to produce sales literature and price lists that are accurate and current.

Briggs & Stratton - Supported by Barrus

E. P. Barrus Ltd., Glen Way, Launton Road, Bicester, Oxfordshire, OX26 4UR

Tel: 01869 363636 Mob: 07796 610378

Email: andy.collins@barrus.co.uk www.barrus.co.uk